Northern machine works
Established 1902
960 Brook Road, Unit 3
Conshohocken, PA 19428
(215) 425-0300

graphic whizard
print finishing solutions

PT 335AKF PLUS

FOLD • CREASE • PERF


The PT 335AKF Plus crease and fold combines the features of the PT 335A Plus Multi creaser with the PT 33IKF folder into one versatile unit. It features a 4" vacuum pile feeder, automatic sheet measurement, a 6" color touchscreen, interchangeable creasing/perforating dies with six different creasing widths, and perfect binding hinge and spine modes. The PT 335AKF Plus can also fold stock weights from 75 gsm (20 lb Bond) up to 350 GSM (16 PT), providing greater versatility for a wide range of finishing applications. Additional features include crease depth adjustments through the touchscreen and an upgraded vacuum pump with variable vacuum suction adjustment. Unique to the PT 335AKF Plus is its progressive crease mode, which calculates crease positions for pre-collated sets, resulting in a square spine on the booklet once run through a bookletmaker. Make the PT 335AKF Plus your easy-to-use, all-in-one creasing and folding solution.

FEATURES

- Crease or Perf up to 35" long sheets into the bypass
- Self adjusting automated smart delivery
- Automated job set up with sheet length measuring
- Interchangeable crease dies to compensate for stock thickness
- Interchangeable dies for perforating with partial perf capabilities




Partial Perf



Interchangeable Die Tool



Seven Fold Options

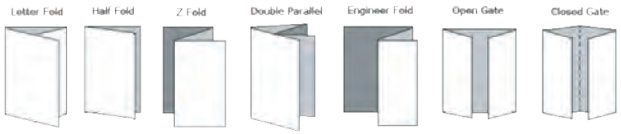

SPECIFICATIONS

Minimum Output Size	5.5" wide x 6" long (13.97cm x 15.24cm)
Maximum Output Size	13" wide x 35" long (33.02cm x 88.90cm)
Paper Weight	75-350 gsm
Number of Creasing Positions	32
Fold Types	7 preset folds and micro-adjust compensation
Feeding Method	4" vacuum pile feed
Speed	6,500 sheets per hour
Job Memory	64
Controls	6" Colour Touch Screen
Machine Weight	441lbs (200kg)
Machine Dimensions	87.4" x 22.8" x 45.6" (222cm x 58cm x 116cm)
Electrical	110-130V, 60Hz, 15A

NOTE: Machine performance will vary based on stock weight, type, and specifications of the job being performed.
WARRANTY: 3 year warranty (excludes consumables)