

PRINT ON VIRTUALLY ANY MEDIA! CMYK + WWWW

UP TO 2880 DPI RESOLUTION

PRINT ON MEDIA UP TO 6 INCHES TALL

DUAL LED LAMPS (Instant Ink Curing)





BEST. EVER.

The X- 36 UV Printer cannot be beat.

Large flatbed printers designed for signage and graphics print at high speeds, but are limited by substrate thickness. Small format printers designed for specialty items print at slower speeds and are limited by substrate length and width.

The Xanté family of X-UV Printers do BOTH. It's the best of both worlds.



Signage • Manufacturing • Specialty Items • Industrial • Packaging





INCLUDED!

Welcome to iQueue Prepress Software

Xante builds on its innovative workflow software with powerful team-based productivity in iQueue 14. True server-client operation enhances your workflow to optimize the talents and time of everyone involved in production. Take advantage of your entire team of IT

Create a new job or simply drag and drop your file into the queue.

Real Estate 1 Xante X-33

lob Type Blank An er

New Empt

Target Devic

Xante X-33 24/261/0 Pri 24/200/0 Pri 24/2

iQueue features include:

- Independent CMYK Density Controls
- PANTONE[®] Color Library
- Right-ON[®] Spot Color Matching
- QR Code Generator
- Full Imposition and Tiling
- PDF-Out AND SO MUCH MORE!




specialists, designers, and printer operators to simplify prepress tasks such as job sharing and job cost estimating, file editing tools, patented Right-ON® Spot Color Matching and much more. Create attention-grabbing displays with VividHD-UV ink. And, with instant curing, your customers will appreciate the fast, durable results.



Imposition allows you to optimize your page layout by placing images in the maximum number of columns and rows while also supporting margins and gutters.

Media Size [?]						Esyout Retate Mecka	10p - 10p
18 x 24" x			•	0			Impose images on the media 2 up. Zup Empose images on the media 2 up. Intervention of the media 2 up.
✓ Auto							Propose images on the media 6 up. Orpose images on the media 6 up. Orpose images on the media 6 up. Orpose images on the media 9 up.
Imag	Left/Top:	6 in	6 in	90			16 Up Impose images on the media 35 up. Maximum Up Impose images and the media swift if and cents. Detect Cel
Left/1	Gutter:	0 in	0 in		PL 101	*	Impose a many image onto the mode an with a dowing for retation
Gutte	Cols/Rows:)	0 in	0 in		and a state	XANTE 33	XANTE XANTE
Cols/F	201	4	3	9	1.01		

White Options Build depth with layers of white

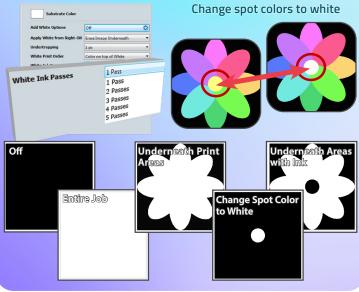



SPECIFICATIONS

PRINTING CAPABILITIES

Imaging area:	36" x 24" (91.4cm x 60.9cm)					
Max. media size:	36" x 24″ (91.4cm x 60.9cm)					
Min. media size:	.5″ x .5″					
Max. print height:	6" (15.24 cm)					
Media transport:	41.3" x 24" (104.9cm x 60.9cm) Vacuum bed					
Print colors:	CMYK + WWWW					
Resolution:	720/1080/1440/2160/2880 DPI Resolutions					
UV lamp:	Dual LED, 385-415 nM, low heat curing lamps					
INK AND MEDIA Ink type:	UV, 500 mL bottles per color The maximum shelf life is 1 (one) year from Date of Manufacture (DoM). Once opened, the shelf life is 2 (two) months or 1 (one) year from DoM, whichever comes first.					
Media types:	PVC plastic, styrene, wood, aluminum, metal, acrylics, coroplast, ceramics, fabric, leather, composites, paperboard, foamboard, glass, carpet, tile and more					
PRINTER CONNECTIVITY	1-Gigabit Ethernet					
PREPRESS SOFTWARE Xanté iQueue Workflow:	Adobe® PostScript® 3™, Independent CMYK Density Control, Spot Color Matching, Imposition, Digital File Editing, Variable Printing, and much more					
WEIGHTS, DIMENSIONS Dimensions: Net/Gross weight: Power supply:	58"L x 63"W x 24"H (147 x 160 x 60cm) 398.2 lbs (181kg) 110v or 220v 50-60hz					
WORKING CONDITION						
Operating temperature:	22-26°C (68°F - 78°F)					
Relative hum idity:	50-80RH					







cs@northernmachine.com

215-425-0300



Call or email for a quote or service!



iQueue Simply Brilliant Workflow (Included)

Digital Color Workflow with Advanced Color Matching and File Management Tools