

EX610

Automatic Punch



The **EX610** High Speed Automatic Punch is capable of producing up to 125,000 punched sheets per hour. It punches preprinted collated documents with or without mixed stocks up to 24" binding edge. Also available as the EX610DA, this Double-Action machine has two dies to punch on both the leading and trailing edges of the paper. The EX610 Duplex with Board Feeder allows the machine to process punched paper and cardboard on two different reception systems.

FEATURES & BENEFITS


- **Very High Output:** Maximizes productivity up to 8,4000 cycles/hour.
- **Versatile:** Automatic for up to 24" sheets widths.
- **Powerful:** Punches virtually any type of stock and material for practically any application.
- **Efficient:** Continuous paper loading increases productivity without stopping the machine.
- **Precise Control:** Automatic sheet alignment with micro adjustment. One direction, one-level continuous sheet control.
- **Heavy-Duty Steel Dies:** Heavy duty tempered steel dies change out quickly and easily. Dies feature guide posts for perfect alignment, quick pin access, and flanged holes to clear waste and add longer life.
- **Turnover Drum:** Keeps pre-collated document pages in perfect order.
- **Easy-to-Use:** Fast and simple to set up and operate. Punch Die Patterns 3:1 & 2:1 Wire-O®; 4:1 plastic coil; plastic comb; Velobind®; 2, 3, & 4-ring binder, and many, many more.

FEATURES & BENEFITS *cont.*

- **Continuous Loading:** Top feed trays speed up productivity with out requiring the operator to stop the machine.
- **Separator Beak:** Separates lifts of paper, even thicker stocks, without damaging the edge.
- **Change Over:** Heavy-duty tempered steel die changes are quick and easy.
- **Air Blow Built-In:** Air blow nozzles built-in: Provides a blast of air so the lift being pulled into the machine will not stick to the sheets still on the feed tray. Helpful with stocks/environment where static is a common problem (includes air lines only - air compressor not included.)
- **Delivery Options:** Variable speed conveyor for continuous delivery or high Pile reception unit for easy one person operation
- **Optional Tabbing Device:** For punching tabbed sheets. Reduces the minimum to 5 1/4". Tabs must have 1/4" shoulder.
- **Optional Nail Hole:** For punching a calendar nail hole in the opposite side of the binding edge, punch-



Sheet Feed

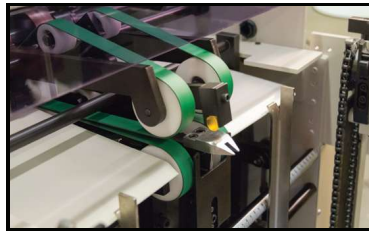

Wide Selection of Dies



Separator Beak

SPECIFICATIONS

Cycle Speed	Up to 125,000 sheets/hour
Punch Speed	Up to 140 cycles/min
Sheet Lift Capacity	Up to 2.5 mm
Max Sheet Size	24" (punched edge) x 21.750
Min Sheet Size	4.25 (BE) x 4
Paper Weight	2-# bond to 1/4" chipboard
Tabbed Stock	Yes
Reception Tray Capacity	6 reams on high Pile/ Continuous feed on conveyor
Dimensions	98" x 52" x 55"
Weight	2,650 lbs.
240v Three Phase 60Hz	12' L x 4' W x 5.45' (3660 x 1220 x 1660)