





960 Brook Road, Unit 3
Conshohocken, PA 19428
(215) 425-0300

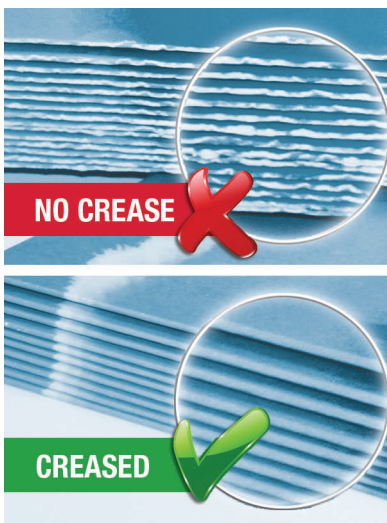

Morgana AutoCreaser S

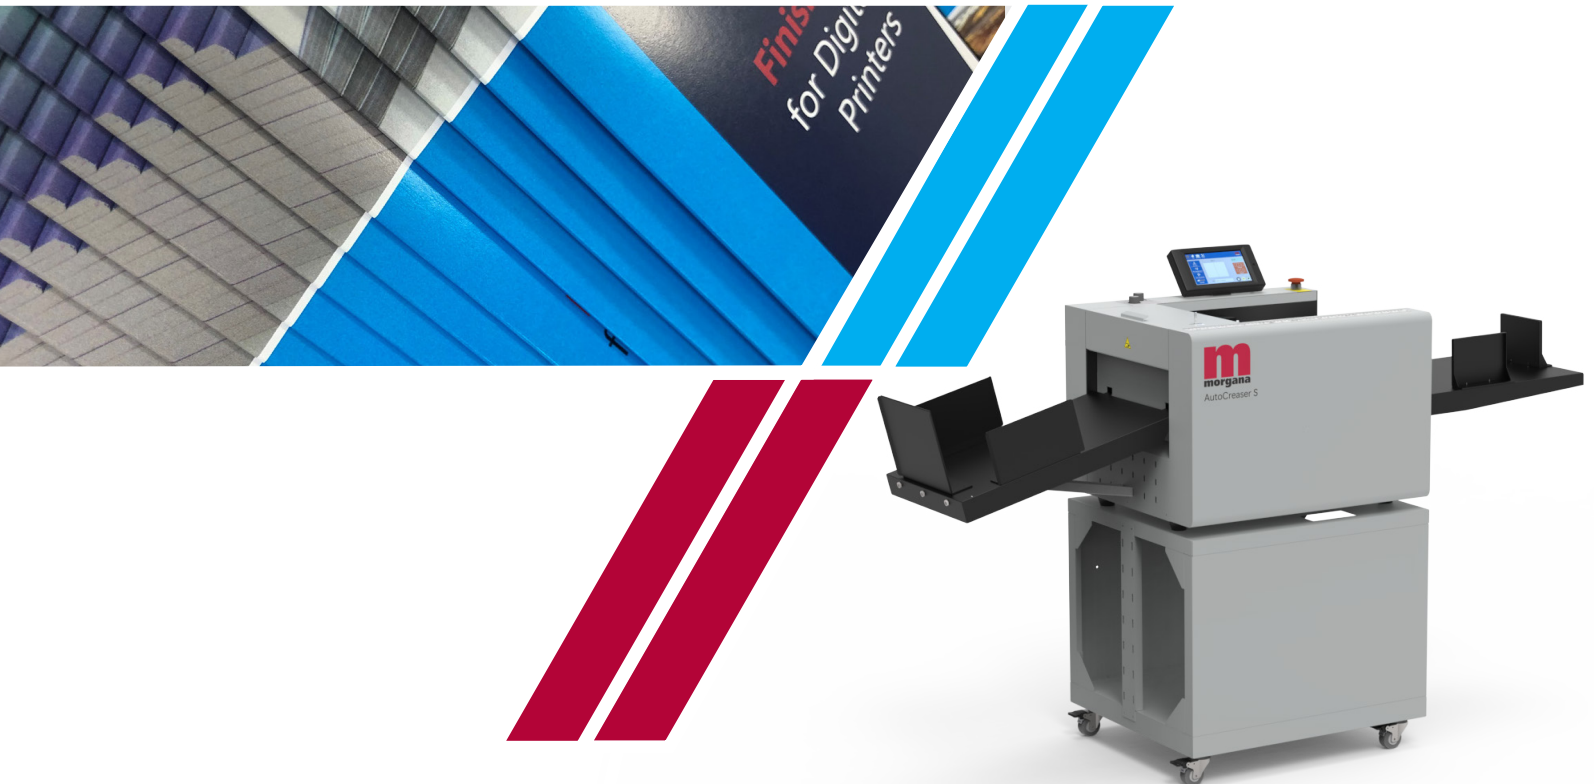

Entry level **creaser** with SmartScreen technology and **easy blade change**

The Morgana AutoCreaser S is a new affordable addition to Morgana range of high-speed creasers, handling format up to 330x900mm (13x35"). With its compact size, crease-depth adjustment feature "on-the-fly", intuitive SmartScreen controls of all main functions together with cost-competitive options such as combined cross- & inline-perforation kit, the AutoCreaser S truly throws punches well above its weight.

The AutoCreaser S is ideally suited for a wide array of short-run jobs facing a service provider in any print finishing environment. Paired with the market-leading Morgana support and service offering, the feature-packed, intuitive and efficient finishing solution that is the AutoCreaser S is bound to impress.

www.plockmaticgroup.com

Technical Specifications



960 Brook Road, Unit 3
Conshohocken, PA 19428
(215) 425-0300

Productivity:	Three fixed speeds 3000/4000/5000 SPH SEF 1-crease A4 (8.5x11")
Feed Technology:	Top feed Vacuum Belt & lead-edge Air separation
Sheet Size Maximum:	330x700mm (13x27.5") 330x900mm (13x35") with optional tray/table extensions
Sheet Size Minimum:	99x150mm (4x6") Subject to media characteristics & reduced stack height
Load Capacity:	100mm (4")
Media Range - Maximum:	0,35mm (0.014"; ~350GSM) Perforation up to 0,25mm (0.010"; ~250GSM) subject to media characteristics & format
Media Range - Minimum:	0,10mm (~0.004"; ~80GSM) Down to 0,075mm (0.003"; ~60GSM) subject to media characteristics, format & reduced stack height
Max # Creases per Sheet:	x32
Minimum distances:	
Between Creases	2mm (0,080")
Lead-edge to Crease	1mm (0,040")
Job Library:	Save up to 36 bespoke jobs: with naming function
Job Templates:	Pre-defined (editable) Templates of x11 most common jobs
Repetitive Accuracy:	+/- 0,3mm (0.012")
Double feed-detection:	No
Inline Perf-strike capability:	No
Power requirements:	100-240 VAC; 5-2.5A; 50-60Hz (1-phase)
Dimensions:	D560 x L1650 x H590mm (D22"xL65"xH23") Excluding Cabinet or Extension Trays D560 x L2090 x H1150mm (D22"xL82"xH42") Including Cabinet and Extension Trays
Weight:	Machine 83kg (184lb) Cabinet/Stand 19kg (42lb)
Optional Kits:	1) Cabinet/Stand 2) Cross Perf Blade Bar (TPI 13/Medium) + x2 Inline/Rotate Perf (TPI 9/Medium) Minimum distance between Inline Perf lines 25mm 3) Narrow Crease Blade: 0.75mm (~0.030") Std Crease Blade included is 1.20mm (~0,047") 4) Tray Extension Kit; for media up to L900mm (35")

*Disclaimer As part of our continued product improvement plan, specifications and information published here are subject to change without notice. All specifications are dependent on application, type of stock, temperature, RH and print engine used. Specifications quoted were measured on uncoated and unprinted stock. E & OE.